

SELF RETRACTING LIFELINES


HY-SAFE TECHNOLOGY'S SELF RETRACTING LIFELINES PROVIDE CONTINUOUS FALL PROTECTION TO WORKERS AS THEY MOVE FROM SAFE ACCESS AREAS INTO FALL HAZARD AREAS.

THE HY-SAFE SELF RETRACTING LIFELINE:

- DURABLE CONSTRUCTION AND RUGGED DESIGN
- PROVIDES CONTINUOUS FALL PROTECTION FOR WORKERS MOVING FROM SAFE ACCESS AREAS INTO FALL HAZARD AREAS
- LIMITS FALL AND DECELERATION DISTANCE
- REDUCES FALL ARREST FORCES
- USED IN ASCENT AND DESCENT APPLICATIONS WHERE OTHER METHODS OF FALL PROTECTION WOULD IMPEDE OPERATIONS
- WHEN USED WITH AN ENGINEERED LIFELINE SYSTEM, ALLOWS FOR VERTICAL OR HORIZONTAL TRAVEL*
- AUTOMATICALLY ADJUSTS TO TAKE UP SLACK
- LIMITS ARREST FORCES TO LESS THAN 900 LBS.
- OPERATES NORMALLY WHEN TENSION IS REMOVED AFTER THE BRAKE IS ENGAGED
- SEALED UNIT WITH SIMPLY DESIGNED INERTIA REELS FOR RELIABILITY, LONG LIFE, AND COST EFFECTIVE SERVICE
- FALL INDICATING SNAPHOOK EXPOSES RED BAND WHEN SUBJECTED TO A FORCE OF APPROX. 900 LBS, INDICATING THE NEED FOR RECERTIFICATION**
- MEETS OR EXCEEDS ALL APPLICABLE OSHA, ANSI, AND CSA STANDARDS

OPTIONS:

- AVAILABLE IN 3/16" STAINLESS STEEL CABLE, NYLON WEB, OR POLYESTER COATED KEVLAR WEB
- LENGTHS FROM 7' TO 130' AVAILABLE
- STEEL, CAST ALUMINUM, OR LIGHTWEIGHT PLASTIC HOUSING OPTIONS AVAILABLE

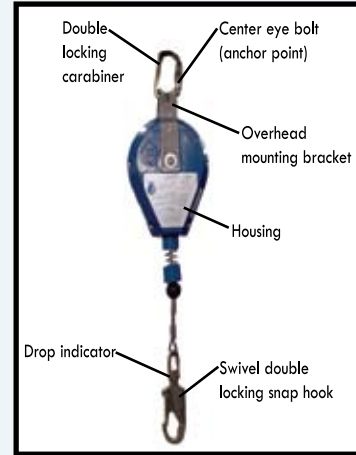

FS 2007
LIGHTWEIGHT & COMPACT
7 FT. WEB RETRACTABLE



FS 2016K
16 FT. POLYESTER COATED
KEVLAR WEB RETRACTABLE



FS 2125C
25 FT. CABLE RETRACTABLE,
PLASTIC HOUSING



FALL INDICATING
SNAPHOOK DETAIL

*ALL HY-SAFE SRL'S SHOULD ONLY BE USED IN CONJUNCTION WITH AN APPROVED ANCHORAGE OR ENGINEERED HORIZONTAL LIFELINE AND ATTACHED TO THE BACK D-RING OF A HY-SAFE HARNESS.

** ALL SRL'S REQUIRE RECERTIFICATION 2 YEARS AFTER INSTALLATION AND EVERY YEAR THEREAFTER. CALL HY-SAFE FOR DETAILS.

960 COMMERCE DRIVE
UNION GROVE, WI 53182
P: 800.642.0775
P: 262.752.2400
F: 262.752.2410
WWW.HYSAFETECH.COM

